


Products in Family

P07638-B21-DR (1 x 8GB RDIMM)
P07640-B21-DR (1 x 16GB RDIMM)
P07642-B21-DR (1 x 16GB RDIMM)
P07646-B21-DR (1 x 32GB RDIMM)
P07650-B21-DR (1 x 64GB RDIMM)



Features	Description
288-pin JEDEC-compliant DIMMs 133.35 mm wide by 31.25 mm high (5.25" x 1.23") Data Transfer Rate: 25.6 Gigabytes/sec Operating Voltage: 1.2V (1.14V~1.26V) Fully RoHS Compliant Thermal Sensor	<p>These HPE compatible memory options are registered memory which conform to JEDEC's DDR4-3200, PC4-3200AA standard.</p> <p>One EEPROM is used for Serial Presence Detect and a combination register/PLL, with Address and Command Parity is also used.</p> <p>A thermal sensor accurately monitors the DIMM module and can prevent exceeding the maximum operating temperature of 85C.</p>

Dataram Product	HPE Product	Product Description
P07638-B21-DR	P07638-B21	1 x 8GB 1Rx8 PC4-3200AA-R22
P07640-B21-DR	P07640-B21	1 x 16GB 2Rx8 PC4-3200AA-R22
P07642-B21-DR	P07642-B21	1 x 16GB 1Rx4 PC4-3200AA-R22
P07646-B21-DR	P07646-B21	1 x 32GB 2Rx4 PC4-3200AA-R22
P07650-B21-DR	P07650-B21	1 x 64GB 2Rx4 PC4-3200AA-R22

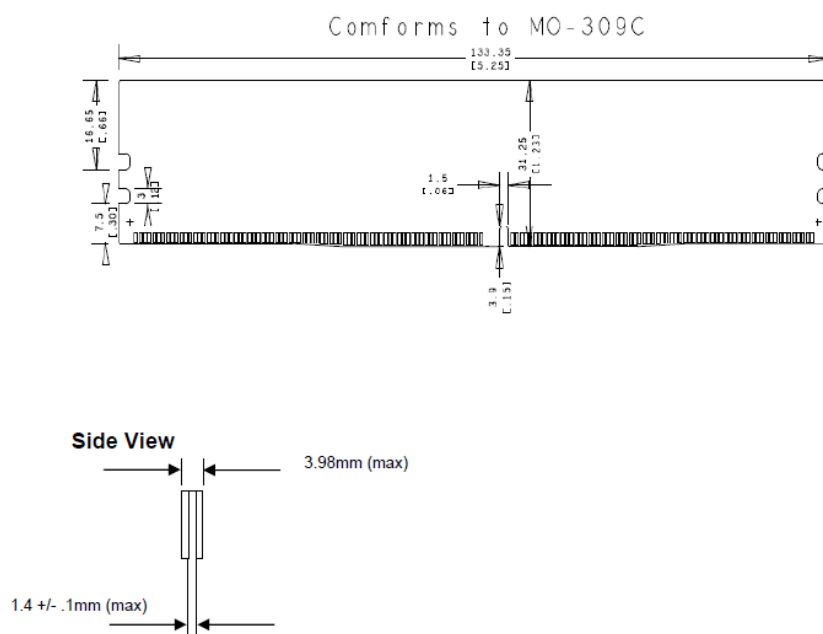

Notes:

1. Tolerances on all dimensions except where otherwise indicated are ± 0.13 . Reference JEDEC standard MO-309C.
2. All dimensions are expressed: millimeters [inches]